

ROLLROLLER RRX COMPRESSOR

KEY FEATURES

- High quality - 5000 h**
- Warranty 2 years
- Low noise level (57dB)
- Air tank in stainless steel
- 2-cylinder compressor engine (550W)
- Solenoid valve for smooth start
- Thermal protector 135±5°C

Choose RRX compressor if ROLLROLLER is equipped with one or more of the following accessories:

- Extended roller adjustment with a total adjustment (stroke of the piston) of >110mm (4 1/3in.)
- Extra glide beam
- Air blow gun

TECHNICAL INFORMATION	ROLLROLLER RRX COMPRESSOR 110V	ROLLROLLER RRX COMPRESSOR 230V
Power Supply *	110V/60Hz *	230V/50 Hz *
Engine	550 W	550 W
Stainless tank size	9 l / 2.37 gal.	9 l / 2.37 gal.
Max pressure	7 bar / 100 psi	7 bar / 100 psi
Air aspired/min / ft ³ /min.	55 l/min / 1.9 ft ³ /min. at 4 bar.	55 l/min / 1.9 ft ³ /min. at 4 bar
Weight	19,7 kg / 43,4 lb.	19,7 kg / 43,4 lb.
Noise level	≤52dB(A)/1m	≤52dB(A)/1m
Dimensions (L x W x H)	480 x 345 x 420 mm / 18.9in. x 13.5 in. x 16.5in.	480 x 345 x 420 mm / 18.9in. x 13.5 in. x 16.5in.
Input power	0,75 HP	0,75 HP
Warranty	2 years	2 years
Part no.	72037	72036



Technical information:

* Two options 110V or 230V

** Secure the compressor's life by monthly cleaning its filter and drain tank weekly.

By doing so you will get a lifetime of approximately 5,000 hours. Calculated runtime 5h/day.

CE certified

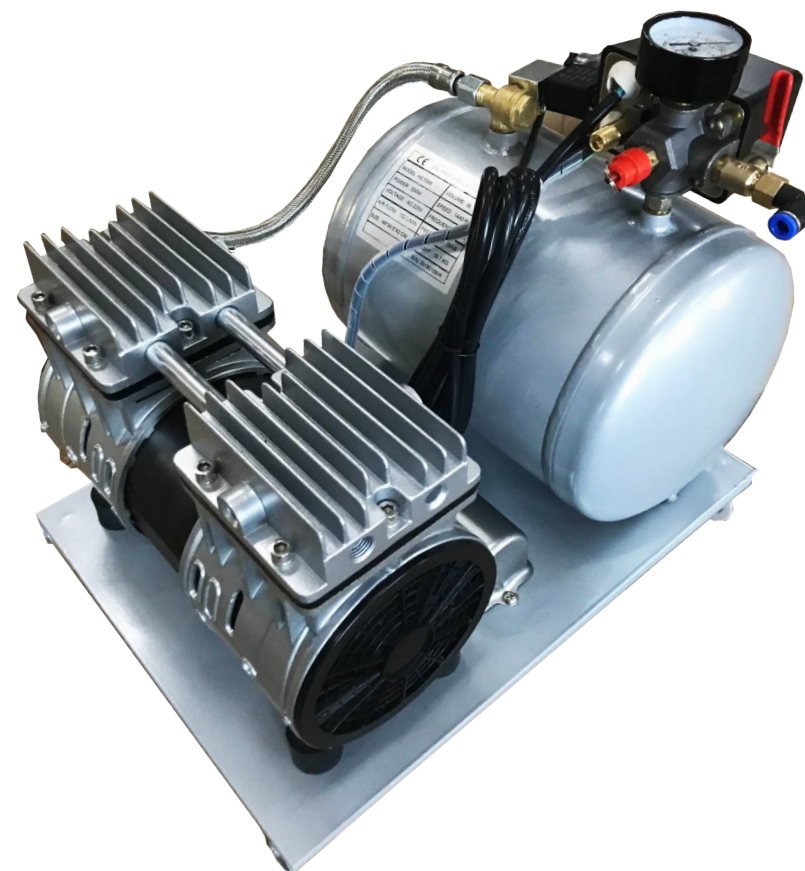

ROLLROLLER
FLATBED APPLICATOR

info@rollroller.se
rollroller.com
+46 54 770 70 10

Patented product developed and manufactured by ROLLROLLER AB in Sweden.